


★ITEM NO : ZH216-NS-T
 ◆GLASS TUBE FUSE ,5.2*20MM , SLOW BLOW
 ★DESCRIPTION :
 ◆END CAP : SILVER-PLATING BRASS
 INSULTING TUBE : LINE GLASS TUBE
 FUSE WIRE : ALLOY SILK
 ★INTERRUPTING RATING
 35A OR 10In WHICHEVER IS GREATER

★SPECIFICATIONS :
 ◆ Voltage Rating: 250V
 ◆ Rating Current:100mA-15A
 ★ MOQ : 60K
 ★ PACKING :
 100PCS/BOX, 20K/CTN
 G.W.: 15KG N.W.: 16KG
 CTN SIZE: 28.5*26*26.5CM

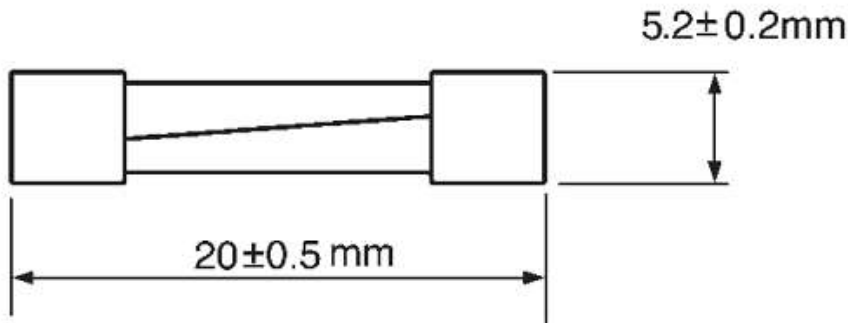


RATED CURRENT	2.1In	2.75In	4In	10In
BROWING TIME	2min Min	600ms Min, 10sec Max	150ms Min, 3sec Max	20ms Min, 300ms Max

ITEM NO.	DESCRIPTION	DOC.NO.	VERSION	DRAW	CHECK	APPROVE	DATE
ZH216-NS	TUBE FUSE	ZH-A-0216					

I-T CHARACTERISTICS CURVE

电流-时间曲线图

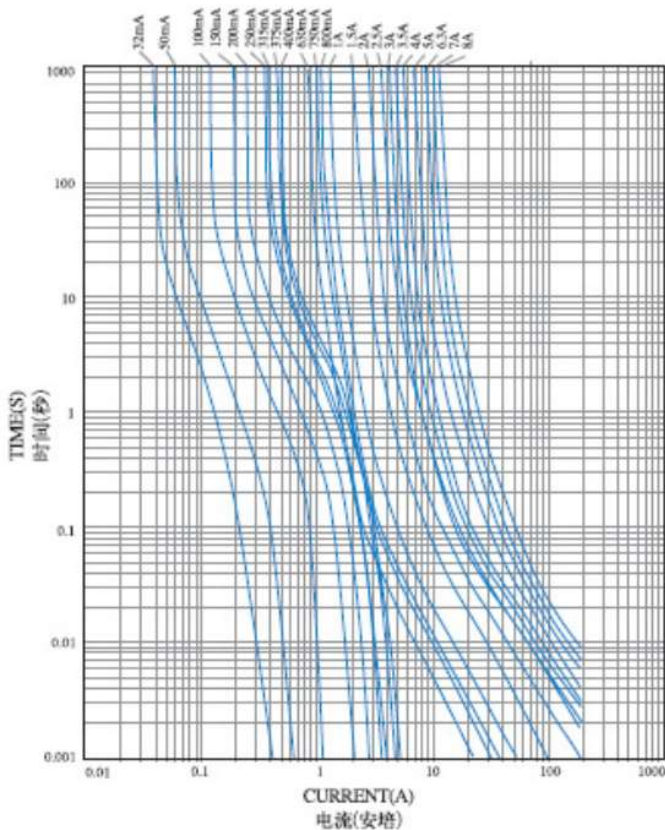

产品目录 Product Model	额定电流 Rating Current	额定电压(V) Rating Voltage
ZH216-0100	100mA	250
ZH216-0125	125mA	250
ZH216-0150	150mA	250
ZH216-0160	160mA	250
ZH216-0200	200mA	250
ZH216-0250	250mA	250
ZH216-0300	300mA	250
ZH216-0315	315mA	250
ZH216-0350	350mA	250
ZH216-0400	400mA	250
ZH216-0500	500mA	250
ZH216-0600	600mA	250
ZH216-0630	630mA	250
ZH216-0750	750mA	250
ZH216-0800	800mA	250
ZH216-010	1A	250
ZH216-013	1.25A	250
ZH216-015	1.5A	250
ZH216-016	1.6A	250
ZH216-020	2A	250
ZH216-030	3A	250
ZH216-032	3.15A	250
ZH216-035	3.5A	250
ZH216-040	4A	250
ZH216-050	5A	250
ZH216-060	6A	250
ZH216-063	6.3A	250